




MetClad® D33

TRAPEZOIDAL CLADDING PROFILE ROOF - FORWARD - STEEL GRADE S280

MetClad® D33 has exceptional spanning capabilities. The result – a highly cost-effective, attractive, and easy-to-install cladding solution.



FORWARD: AVAILABLE WITH OR WITHOUT SWAGES

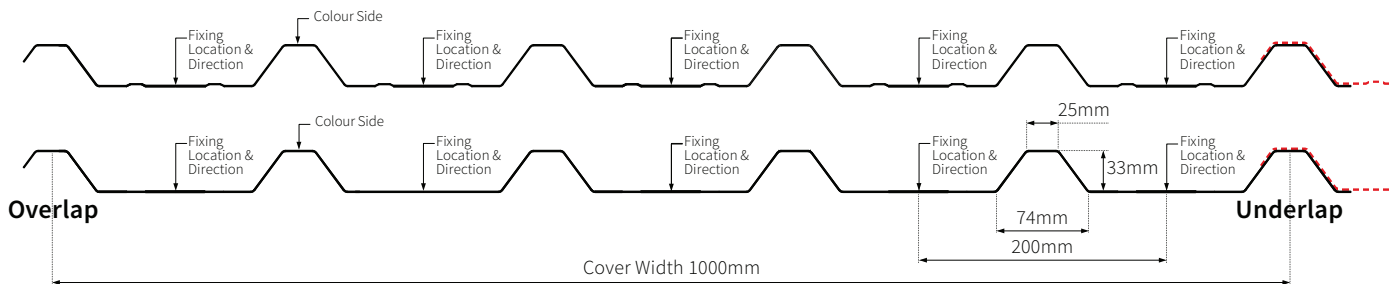

Gauge	Span [m]		0.8	0.9	1.0	1.1	1.2	1.3	1.4	1.5	1.6	1.7	1.8	1.9	2.0	2.1	2.2	2.3	2.4	2.5	2.6	2.7	2.8	2.9	3.0
			Gravity	Single	4.69	4.17	3.75	3.41	3.12	2.78	2.32	1.89	1.56	1.30	1.09	0.93	0.80	0.69	0.60	0.52	0.46	0.41	0.36	0.32	0.29
0.5mm	Double	2.99	2.55	2.20	1.92	1.69	1.50	1.35	1.21	1.10	1.00	0.92	0.84	0.78	0.72	0.67	0.62	0.58	0.54	0.51	0.48	0.45	0.42	0.39	
	Multi	3.52	3.00	2.59	2.27	2.01	1.79	1.60	1.45	1.31	1.20	1.10	1.01	0.93	0.86	0.80	0.75	0.70	0.65	0.60	0.54	0.48	0.44	0.39	
	Uplift	Single	4.69	4.17	3.75	3.41	2.95	2.51	2.17	1.89	1.58	1.31	1.11	0.94	0.81	0.70	0.61	0.53	0.47	0.41	0.37	0.33	0.29	0.26	0.24
	Double	3.10	2.65	2.29	2.00	1.77	1.58	1.41	1.28	1.16	1.06	0.97	0.89	0.82	0.76	0.71	0.66	0.62	0.58	0.54	0.51	0.48	0.44	0.40	
	Multi	3.64	3.11	2.70	2.36	2.09	1.87	1.68	1.52	1.38	1.26	1.16	1.07	0.99	0.91	0.85	0.79	0.74	0.69	0.61	0.55	0.49	0.44	0.40	
	0.7mm	Gravity	Single	9.29	8.26	7.43	6.24	5.24	4.42	3.54	2.88	2.37	1.98	1.66	1.41	1.21	1.05	0.91	0.80	0.70	0.62	0.55	0.49	0.44	0.40
Double		5.39	4.55	3.90	3.39	2.97	2.63	2.34	2.10	1.90	1.72	1.57	1.44	1.32	1.22	1.13	1.05	0.98	0.91	0.85	0.80	0.74	0.66	0.60	
Multi		6.37	5.40	4.64	4.03	3.54	3.14	2.81	2.52	2.28	2.07	1.89	1.74	1.60	1.48	1.37	1.27	1.17	1.04	0.92	0.82	0.74	0.66	0.60	
Uplift		Single	9.29	8.12	6.58	5.44	4.57	3.89	3.36	2.92	2.40	2.00	1.69	1.43	1.23	1.06	0.92	0.81	0.71	0.63	0.56	0.50	0.45	0.40	0.36
Double		5.70	4.83	4.16	3.62	3.18	2.82	2.52	2.27	2.05	1.87	1.71	1.57	1.44	1.33	1.24	1.15	1.07	1.00	0.93	0.83	0.75	0.67	0.61	
Multi		6.71	5.71	4.92	4.29	3.78	3.36	3.01	2.71	2.46	2.24	2.05	1.88	1.74	1.61	1.49	1.35	1.19	1.05	0.93	0.83	0.75	0.67	0.61	
0.9mm	Gravity	Single	15.30	12.39	10.03	8.29	6.97	5.82	4.66	3.79	3.12	2.60	2.19	1.86	1.60	1.38	1.20	1.05	0.92	0.82	0.73	0.65	0.58	0.52	0.47
	Double	8.12	6.82	5.81	5.02	4.38	3.86	3.43	3.07	2.76	2.50	2.27	2.08	1.91	1.75	1.62	1.50	1.40	1.30	1.21	1.08	0.97	0.87	0.79	
	Multi	9.64	8.11	6.94	6.01	5.25	4.64	4.13	3.70	3.33	3.02	2.75	2.52	2.31	2.13	1.97	1.75	1.54	1.36	1.21	1.08	0.97	0.87	0.79	
	Uplift	Single	13.84	10.93	8.86	7.32	6.15	5.24	4.52	3.94	3.29	2.74	2.31	1.96	1.68	1.45	1.26	1.11	0.97	0.86	0.77	0.68	0.61	0.55	0.50
	Double	8.59	7.24	6.19	5.37	4.70	4.15	3.69	3.31	2.99	2.71	2.47	2.26	2.07	1.91	1.77	1.64	1.53	1.42	1.28	1.14	1.02	0.92	0.83	
	Multi	10.17	8.59	7.37	6.40	5.61	4.97	4.43	3.98	3.59	3.26	2.98	2.73	2.51	2.31	2.11	1.84	1.62	1.44	1.28	1.14	1.02	0.92	0.83	
1.2mm	Gravity	Single	21.15	16.71	13.54	11.19	9.40	7.85	6.28	5.11	4.21	3.51	2.96	2.51	2.16	1.86	1.62	1.42	1.25	1.10	0.98	0.88	0.79	0.71	0.64
	Double	12.72	10.60	8.99	7.72	6.71	5.89	5.21	4.64	4.17	3.76	3.41	3.11	2.84	2.61	2.41	2.23	2.06	1.84	1.64	1.46	1.31	1.18	1.06	
	Multi	15.18	12.69	10.79	9.29	8.09	7.11	6.30	5.62	5.05	4.56	4.14	3.78	3.46	3.10	2.70	2.36	2.08	1.84	1.64	1.46	1.31	1.18	1.06	
	Uplift	Single	19.33	15.27	12.37	10.22	8.59	7.32	6.31	5.50	4.69	3.91	3.29	2.80	2.40	2.07	1.80	1.58	1.39	1.23	1.09	0.98	0.88	0.79	0.71
	Double	13.32	11.14	9.46	8.15	7.09	6.23	5.52	4.93	4.43	4.00	3.63	3.31	3.03	2.79	2.57	2.38	2.21	2.05	1.82	1.63	1.46	1.31	1.19	
	Multi	15.86	13.30	11.33	9.78	8.53	7.51	6.66	5.96	5.36	4.85	4.41	4.02	3.69	3.39	3.01	2.63	2.32	2.05	1.82	1.63	1.46	1.31	1.19	

- Available in 0.5mm, 0.7mm, 0.9mm and 1.2mm gauges.
- Tables calculated by the SCI to BS EN 1993-1-3:2006.
- All loads are unfactored / characteristic and in kN/m². Load factor (working loads to ultimate) x 1.5.
- Deflection Limits: Gravity Load Case = Span / 200, Wind Uplift Load Case = Span / 150.
- Cladding profile available in various finishes and colours. Contact CMF for more information.



For further information please contact CMF:

June 2024: v1.5



Construction Metal Forming
 Unit 3, Mamhilad Technology Park,
 Old Abergavenny Rd, Mamhilad,
 Monmouthshire, NP4 0JJ.

Customer services: 01495 761 080
Sales enquiries: 01495 788 936
Technical support: 01495 788 937
 e: info@cmf.uk.com | www.cmf.uk.com